

**EE120, Spring/1998**  
**exam #1**  
**Professor Lau**

This is a closed book, closed-notes exam. You are allowed one double-sided 8.5" x 11" handwritten crib sheet. No calculators. There are four problems. Please make sure you have all the problems. Each problem is worth 20 points.

**Problem #1 (5 points each)**

Determine if each of the following signals is periodic. If it is periodic, determine its fundamental period.

(a)  $x(t) = 5\sin(t + \pi/2)$

Periodic? \_\_\_\_\_ Fundamental period = \_\_\_\_\_

(b)  $x(t) = \exp[j(t^2 + 2t)]$

Periodic? \_\_\_\_\_ Fundamental period = \_\_\_\_\_

(c)  $x(t) = \sin(13t)$

Periodic? \_\_\_\_\_ Fundamental period = \_\_\_\_\_

(d)  $x(t) = \sin^2(13t)$

Periodic? \_\_\_\_\_ Fundamental period = \_\_\_\_\_


**Problem #2 (4 points each)**

Determine if each of the following systems is i) linear, ii) time invariant. Mark the box with either a Y or N. Empty or illegible answers will be marked wrong.


|  | Linear? | Time Invariant? |
|--|---------|-----------------|
| a) $y(t) = \sin(x(t))$                                   |         |                 |
| b) $y(t) =  x(t) $                                       |         |                 |
| c) $y(t) = x( t )$                                       |         |                 |
| d) $y(t) = x(t)u(t)$                                     |         |                 |
| e) $y(t) = \int_{-\infty}^t e^{-(t-\tau)} x(\tau) d\tau$ |         |                 |

**Problem #3 (10 points each)**


Given this LTI system, with the impulse response  $h(t)$ :

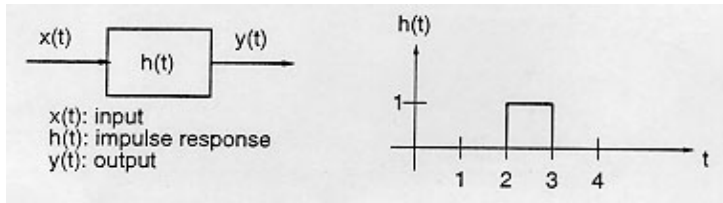

(a) Given  $x(t)$  below, sketch  $y(t)$ . Please label appropriately.

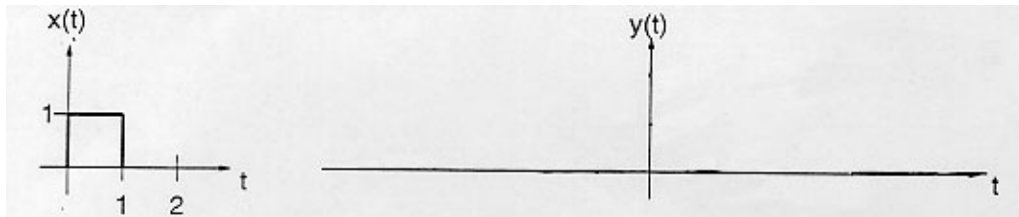


(b) Given  $x(t)$  below, sketch  $y(t)$ . Please label appropriately.

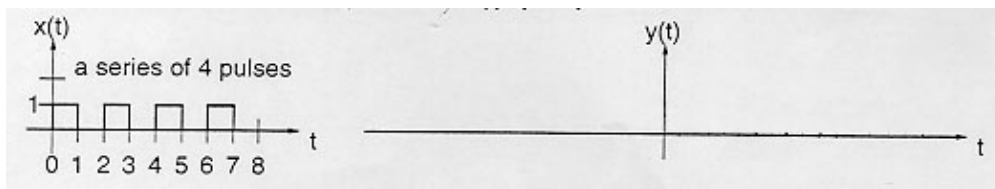

**Problem #4 (6 + 7 + 7 points)**

Given the circuit below,

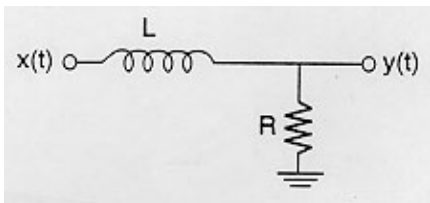

a) Derive the differential equation relating  $x(t)$  and  $y(t)$ .

Note: voltage across the inductor =  $L \, di/dt$

b) Find the impulse response  $h(t)$ .

c) Find the step response  $s(t)$ .

sp-1

**Posted by HKN (Electrical Engineering and Computer Science Honor Society)  
University of California at Berkeley  
If you have any questions about these online exams  
please contact [examfile@hkn.eecs.berkeley.edu](mailto:examfile@hkn.eecs.berkeley.edu).**